


SKU: 20069


General Information

Wing Span	250 cm
Height	87 cm
Sail	40D Polyester (Ventex strong)
Wind Range	2-6 Bft
Level	Experte
Category	Power, Speed
Delivery	Kite only

Bridle

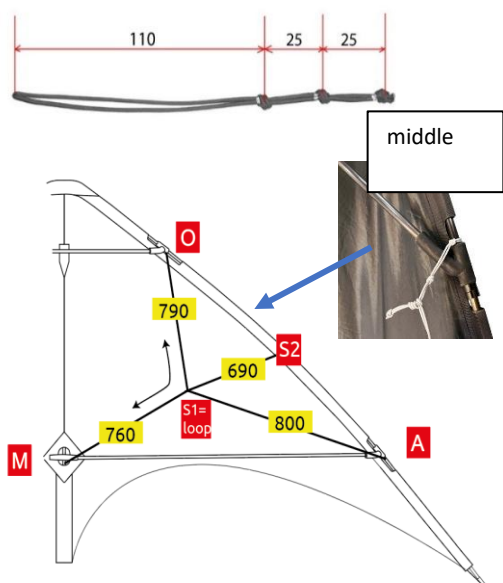

All fastenings of the bridle to the rods with double knots as shown in the picture, also on

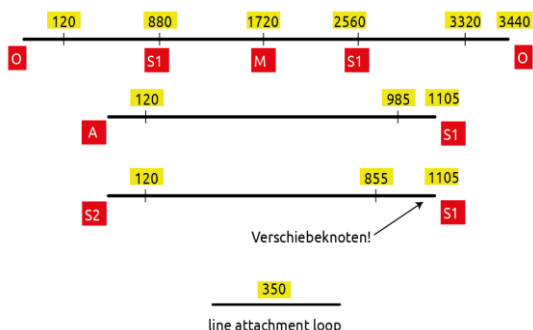

Material: Dyneema 96 kg, cored

Frame

Tube / Rod	Name	#	Length (mm)
Upper Leading Edge	Kohlefaser Rohr 8 mm	2	750
Lower Leading Edge	Kohlefaser Rohr 8 mm	2	750
Spine	Kohlefaser Rohr 8 mm	1	825
Upper Spreader	Kohlefaser Rohr 8 mm	1	530
Lower Spreader	Kohlefaser Rohr 8 mm	2	887
Standoff	CFK Vollstab 3 mm	2	205
Inner Lathes	CFK Vollstab 4 mm	2	440
Outer Lathes	CFK Vollstab 4 mm	2	205

Parts

Position	Name	#
Upper Leading Edge	Leading Edge Connector 8 mm	2
Lower Leading Edge	Leading Edge Connector 8 mm	2
Wing Tip	Split nock 8 mm	2
End Of Spine	Vinyl Tube 8 mm	1
Standoff Spreader	Standoff Spreader 8 mm	2
	Stand off connector with	
Standoff Spreader	Screw 3 mm	2
Center Tee	Center-Tee 8 mm	1
Leading Edge Ferrule	Aluminum Ferrule 8 mm	2
C-Clips	C-Clips 6 mm	8

Further Information

Recommended Flying Lines:

2 - 3 Bft	Skyline Dyneema 100 DaN 35m
4 - 6 Bft	Skyline Dyneema 160 DaN 35m